



**“Dry” Concrete Installation Instructions for Hinged GuardShack Models**

**Step 1.** Use (C Pad) Formation for GS-3 & CGS-3 models. No cutting necessary. Finished length will be 48”L.



**Step 2.** Grade area for the pad. Wrap the risers with pipe wrap (not included) where they will contact the concrete.

**Step 3.** Set up the 2 forms in the (C Pad) formation as shown. Level and stake the forms. Put the screws through the forms into the stakes as shown. (See FIG. 1)

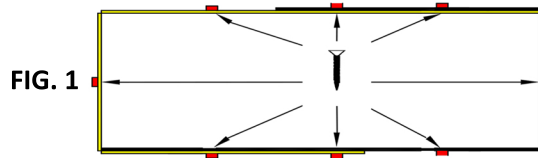

**Step 4.** Fill form to the top with concrete. Finish concrete. Let pad dry completely.

**Step 5.** Place the enclosure on pad with the hinges close to the device. Mark the location of hinges. Hinge enclosure open and align with the existing hinge markings, then mark locations to be drilled for anchors. Remove enclosure. (See FIG. 2)

**Step 6.** Drill 5/8” holes for the anchors (included in hardware kit) to 2 1/2” deep. Tap anchors into the concrete with hammer.

**Step 7.** Place enclosure back on the pad, standing up, so as to line up with the hinge bolt anchors. Insert hinge bolts through washers (included in hardware kit) and then through the hinge plate into the anchors. Tighten bolts with wrench. (See FIG. 3)

**Step 8.** Lower enclosure and mark hole for eye bolt anchor.

**Step 9.** Hinge back enclosure to continue working. Drill 5/8” diameter hole 2 1/2” deep for eye bolt anchor. Tap anchor into hole with hammer. (See FIG. 4)

**Step 10.** Insert eye bolt into anchor. Tighten eye bolt with wrench. Lower the enclosure down over eye bolt. Install padlock. (See FIG. 5)

**Step 11.** Strip forms and stakes, discard.

**Step 12.** Grade soil up to pad. Your’e done!

The 12 step method to breaking your addiction to wooden forms!

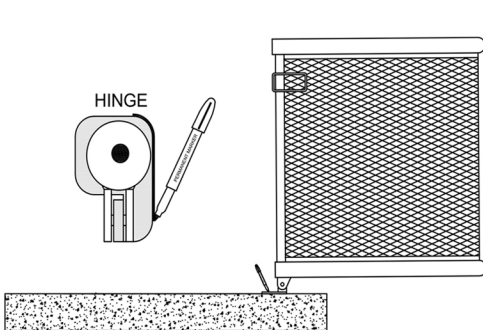


FIG. 2

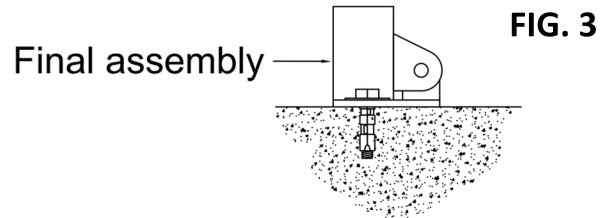


FIG. 3

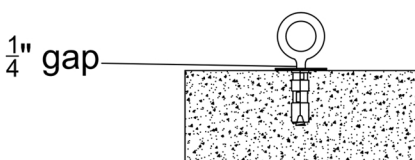


FIG. 4

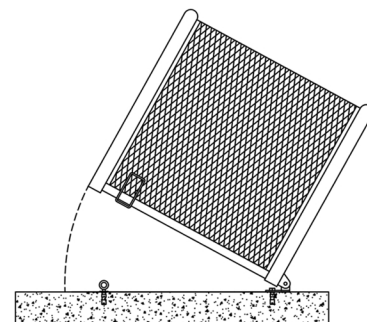


FIG. 5